


## Declaration Of Performance

1. Reference No: SD-PVDF AL

2. Product type: SpeedDeck Aluminium profile, EN AW-3004/3005/3105, Rp0,2 min=170N/mm<sup>2</sup>

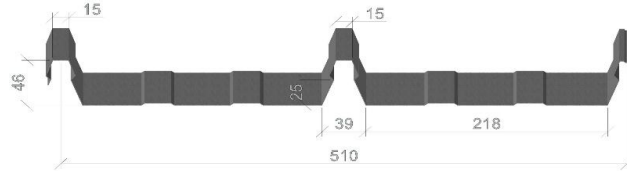

3. Intended use: Self-supporting, secret-fix standing seam profile for roofs and walls

4. Manufacturer: Metal Roofing & Cladding Limited. Stourprt Road, Kidderminster, Worcestershire. DY11 7QL.

5. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V

| System 3                                                                                                         | System 4                                                      |
|------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|
| Products are conducted though initial inspection and are subject to production audits according to EN 14782:2006 | System 4 has been used for constancy of other characteristics |

6. Harmonised standard EN 14782

### 7. Declared Performance

| Main Characteristic              | Performance                                                                              | Harmonised Technical Specifications |
|----------------------------------|------------------------------------------------------------------------------------------|-------------------------------------|
| Resistance to concentrated force | NPD                                                                                      | EN 14782:2006, Section 4.3          |
| Material thickness               | 0.9mm - 1.2mm<br>PVDF coated aluminium                                                   | EN 14782:2006, Section 4.8          |
| Dimensional tolerances           | NPD                                                                                      | EN 14782:2006                       |
| Water permeability               | Impermeable in the absence of holes<br>Visual inspection passed                          | EN 14782:2006, Section 4.4          |
| Dimensional changes              | Thermal expansion coefficient:<br>aluminium $24 \times 10^{-6} \text{ K}^{-1}$           | EN 14782:2006, Section 4.6          |
| Release of hazardous substances  | NPD                                                                                      | EN 14782:2006, Section 4.11         |
| External fire performance        | Class B <sub>roof</sub> (t1), class B <sub>roof</sub> (t2), class B <sub>roof</sub> (t3) | EN 14782:2006, Section 4.9          |
| Reaction to fire                 | A1                                                                                       | EN 14782:2006, Section 4.10         |
| Durability                       | NPD                                                                                      | EN 14782:2006, Section 4.3 and 4.8  |

8. The performance of the product according to the number 1 and 2 corresponds to the declared performance of number 7. The manufacturer according to point 4 is alone responsible for the issue of this declaration of performance. Signed on behalf of and in the name of the manufacturer by:



Tom Parkes  
General Manager

Kidderminster, England, 17/03/2025